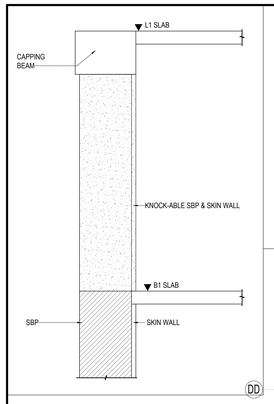

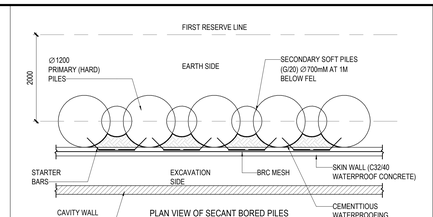

PLAN VIEW OF SECANT BORED PILES WITH KNOCK-ABLE SBP & SKIN WALL

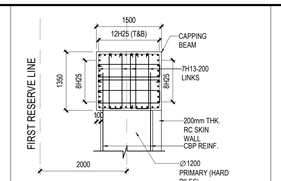

1350(D) x 1500(W) CAPPING BEAM DETAILS ABOVE KNOCK-ABLE SBP

Top Rebar = 12H25+12H25
Bottom Rebar = 12H32+12H32
Length of capping beam with improved details=
8.4m+2x2m = 12.4m

NOTE: (UNLESS OTHERWISE STATED):

1. THIS DRAWING IS TO BE READ IN CONJUNCTION WITH RELEVANT ARCHITECTURAL AND M&E DRAWINGS.
2. ALL DIMENSION, SETTING OUT, DROPS, LEVEL & OPENING FOR SERVICES TO BE CHECKED AGAINST RELEVANT ARCHITECTURAL AND M&E DRAWINGS.
3. THIS DRAWING PROVIDE THE NOTIONAL STRUCTURAL SYSTEM AND CONCEPTS TO BE FURTHER DEVELOPED IN SCHEMATIC DESIGN - STAGE 2. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ENSURING THAT THE FINAL DESIGN MEETS ALL REQUIREMENTS SET OUT IN THE LATEST ARCHITECTURAL, M&E AND TECHNICAL SPECIFICATIONS.
4. ALL H-B1S1 SLAB SHALL BE 850 THK, H-B1S2 SLAB SHALL BE 1300THK AND H-B1S3 SLAB SHALL BE 500THK USING CONCRETE GRADE OF C50/60.
5. H-B1S1 BASE REINFORCEMENTS SHALL BE H20-200 (TT), H20-100 (BB), H20-200(T&B) WITH HOOK LINKS OF H10-200 BOTH WAYS, H-B1S2 BASE REINFORCEMENTS SHALL BE H20-125 TOP AND BOTTOM, BOTH WAYS (TT, T, BB & B), AND H-B1S3 BASE REINFORCEMENTS SHALL BE H16-150 TOP AND BOTTOM, BOTH WAYS (TT, T, BB& B)
6. ALL REINFORCEMENT LAPPING LENGTH TO BE TL.
7. FOR REINFORCEMENT THAT EXCEEDS 12m, THE LAPPING SHOULD BE DONE AT WHERE STRESS IS MINIMUM.
8. STRAND TRIMMER BARS ARE TO BE PROVIDED FOR ALL OPENING IN SLAB, REFER DWG NO. TGCH-00-SD-02.
9. SLAB TO BE 300MM THK.
10. ALL DROP PANELS SHALL BE 3000(W) X 3000(L) X 600(D).
11. ALL DIAPHRAGM WALL AND SBP SHALL BE PROVIDED WITH THE RC SKIN WALL AND RC SKIN WALL SHALL BE CASTED USING CONCRETE WITH WATERPROOFING ADMIXTURE AND WATERPROOFING CEMENTITIOUS MEMBRANE SHALL BE PROVIDED TO THE SURFACE BETWEEN DIAPHRAGM WALL/SBP AND THE RC SKIN WALL. CAVITY WALL SHALL BE PROVIDED TO DWALL AND SBP ADJACENT TO SPACES WHICH ARE HIGHLY SENSITIVE TO HUMIDITY AND REQUIRE DRY ENVIRONMENT.
12. AFTER EXPOSURE OF SBP, SBP TO BE OBSERVED FOR 3 DAYS TO BE DRY BEFORE DRILLING OF STARTER BARS / APPLICATION OF WATERPROOFING
13. ALL BASEMENT 1, 2 AND 3 SLABS WHICH ARE IN CONTACT WITH SOIL SHALL BE CASTED USING CONCRETE WITH WATERPROOFING ADMIXTURE FOR CONCRETE AND SHEET WATERPROOFING MEMBRANE SHALL BE PROVIDED.
14. ALL BASEMENT 1, 2 & 3 CIS BASEMENT WALLS WHICH ARE IN CONTACT WITH SOIL SHALL BE CASTED USING CONCRETE WITH WATERPROOFING ADMIXTURE FOR CONCRETE AND SHEET WATERPROOFING MEMBRANE SHALL BE PROVIDED.
15. THE CONTRACTOR IS TO BE RESPONSIBLE FOR THE WATERPROOFING OF BASEMENT SLAB AND BASEMENT WALL AND COMPLY WITH WATERPROOFING TERMINATION DETAILS PROVIDED BY APPROVED WATERPROOFING SUPPLIER.
16. CONTRACTOR TO SUBMIT LOCATIONS OF RE-INJECTABLE GROUT TUBES AT PROPOSED CONSTRUCTION JOINTS, SUBJECT TO SO'S APPROVAL.

LEGEND:
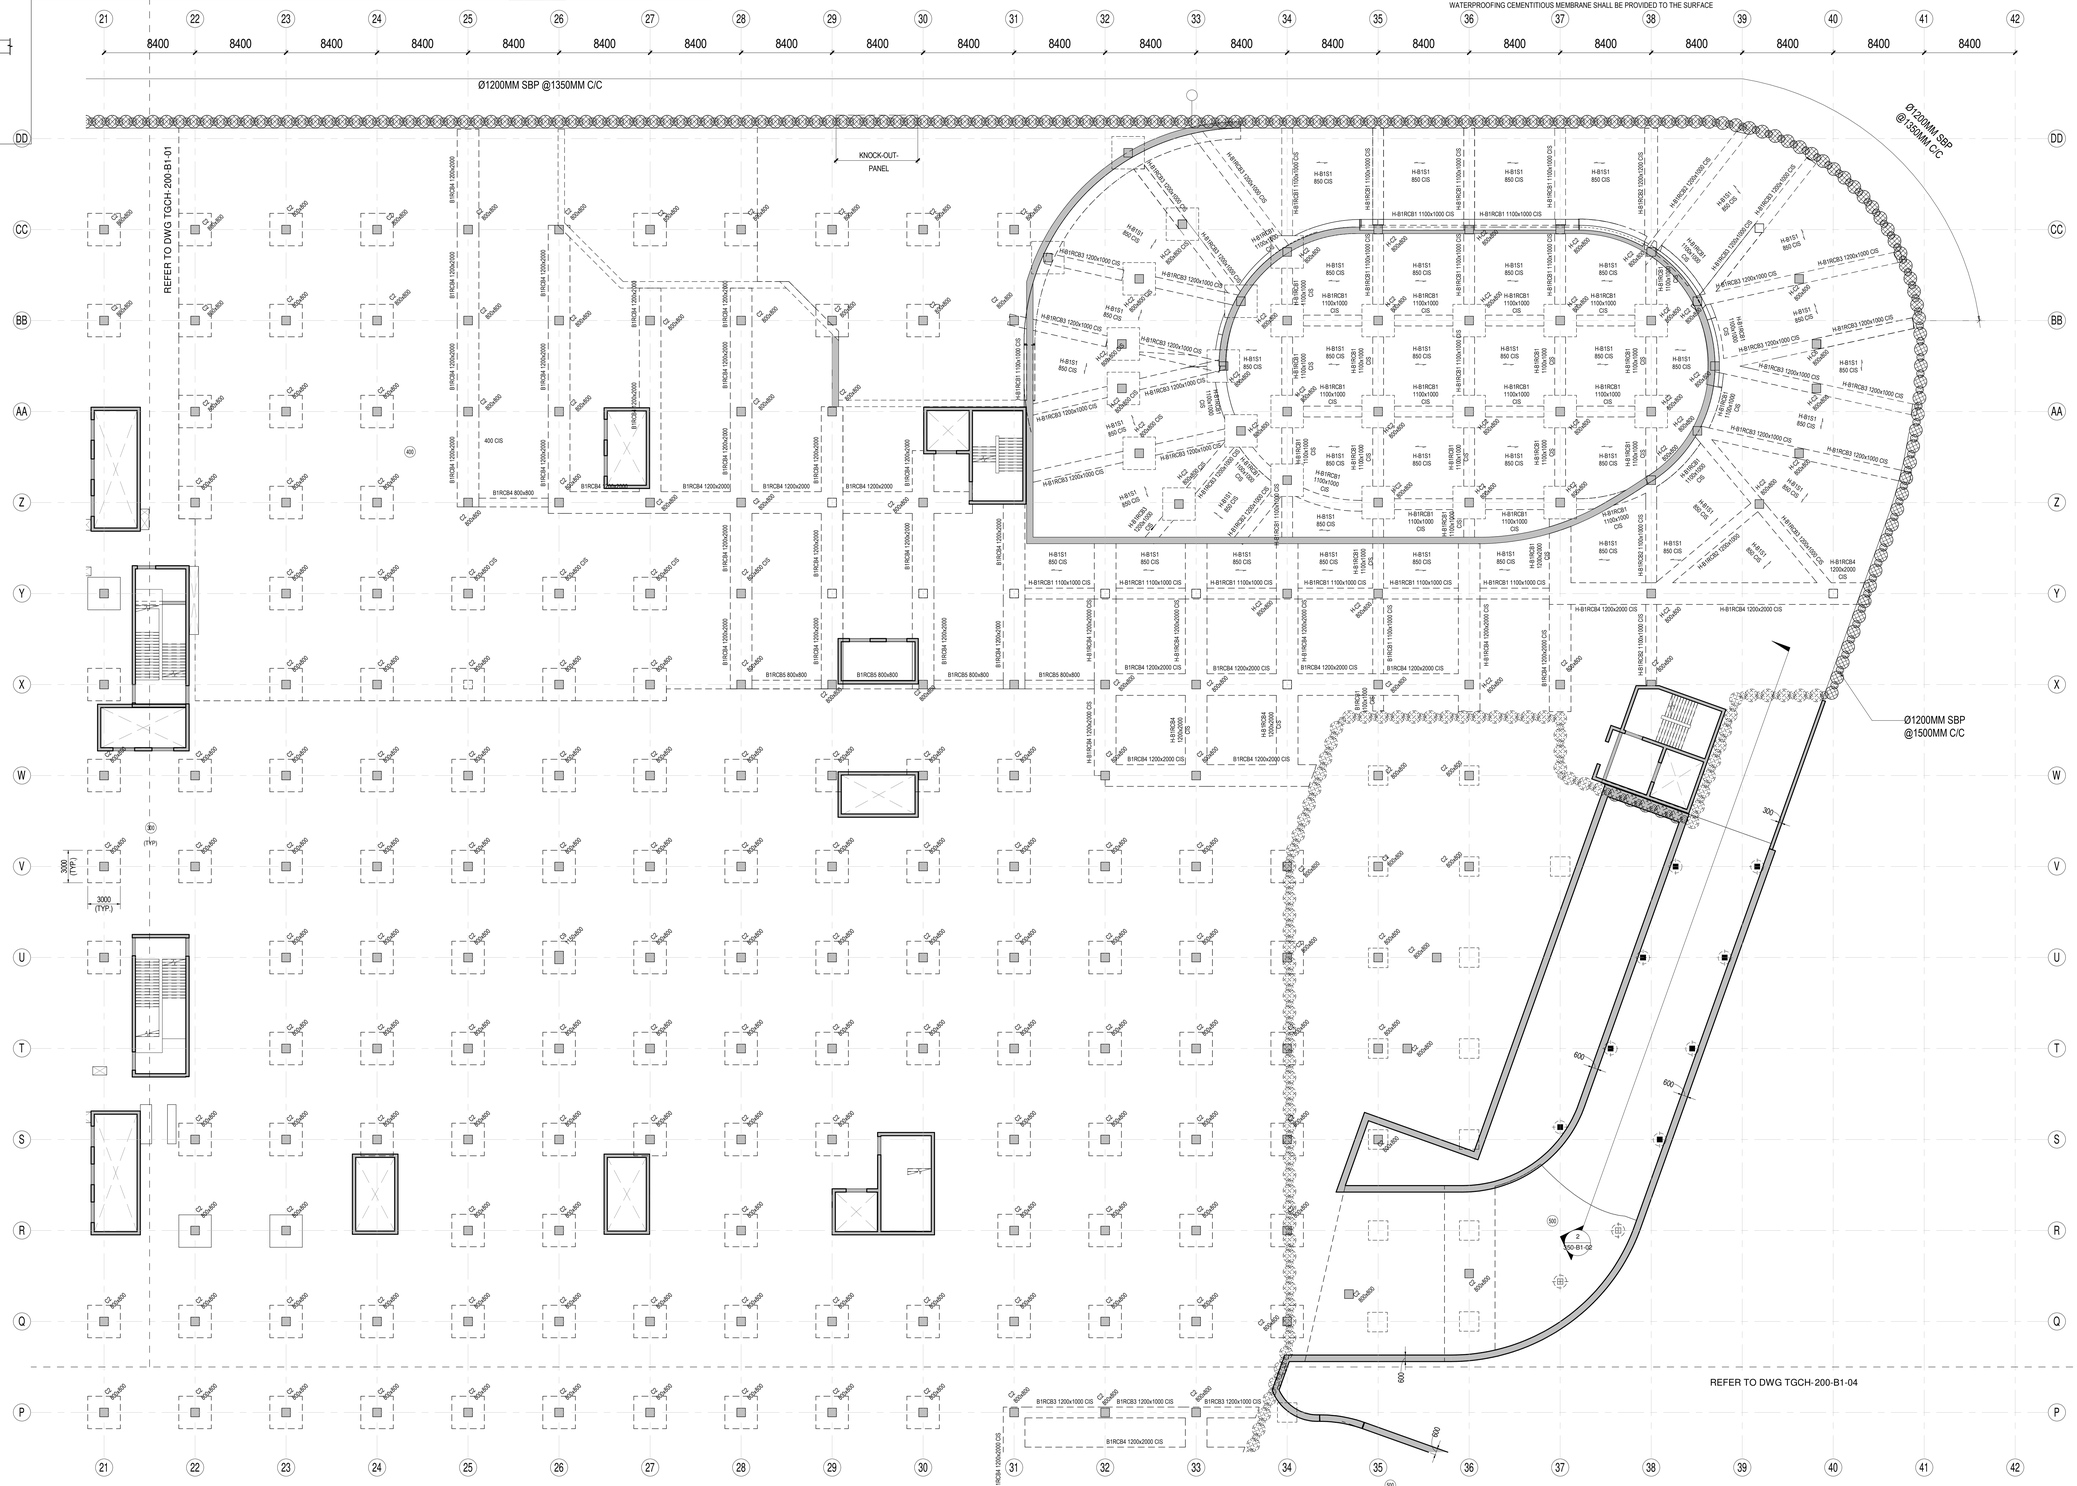
- WALL / COLUMN ABOVE AND BELOW
- TERMINATED WALL / COLUMN BELOW THIS LEVEL
- (300) SLAB THICKNESS